

WARRIOR MET COAL MINING, LLC

MINE NO. 7, P-3247

REVISION NO. 55

ALABAMA SURFACE MINING COMMISSION

PERMIT REVISION APPLICATION

P A R T I I I

Prepared by:

MCGEHEE ENGINEERING CORP.

P. O. Box 3431
450 19th Street West
Jasper, Alabama 35502-3431
Telephone (205) 221-0686

PART III - OPERATION PLAN

A. General Operations Information

1. Describe the type and method of coal mining procedures and major equipment to be used. No changes to the Operation Plan.
2. Describe the sequence and timing of increments to be mined (as shown on permit map) over the total life of the permit. The timing of increments is as follows:

<u>Increment No.</u>	<u>Acres</u>	<u>Dates</u>	
		From	To
1	1,962	Effective Date	60 months after
2	15	Effective Date	60 months after
3	9	Effective Date	60 months after
4	12	Effective Date	60 months after
5	47	Effective Date	60 months after
6	6	Effective Date	60 months after
TOTAL		2051	

The sequence of mining operations will be generally as follows:

- 1) Construction of Sediment Control Structures
- 2) Site Preparation
- 3) Construction
- 4) Site Reclamation
- 5) Revegetation

3. Attach a narrative explaining the construction modification, use, maintenance, and removal of the following facilities: (780.11)

(a) Coal removal, handling, storage, cleaning and transportation structures and facilities;

Not Applicable

(b) Spoil, coal mine waste and non-coal mine waste removal, handling, storage, transportation and disposal structures and facilities;

See Attachment III-A-3 & III-B-2(a)

(c) Mine facilities; and

Not Applicable

(d) Water pollution control facilities;

See attachment III-B-2(a) and original permit

**WARRIOR MET COAL MINING, LLC
MINE NO. 7, P-3247, R-57
ATTACHMENT III-A-3**

Mine facilities

Revision No. 57 proposes to add a shaft site and a powerline right of way acres to Increment No. 1. The revision also proposes to add a utility borehole site and access roads. Warrior Met Coal Mining, LLC proposes to acquire a Construction Stormwater Permit from the Alabama Department of Environmental Management (ADEM) to control surface runoff during the construction period.

B. Engineering Plans.

All cross sections, maps and plans related to the operations, reclamation and structures must comply with Section 780.10. Plans, appropriate calculations and conclusions shall be presented in a clear and logical sequence and shall take into account all applicable factors necessary to evaluate the proposed plan or design.

1. Existing Structures. (780.12, 786.21)

(a) Describe each existing structure to be used, its location, current condition, approximate dates of construction and evidence (including relevant monitoring data) showing whether or not the structure meets the performance standards of Subchapter K or Subchapter B, whichever is more stringent and demonstrate whether or not the use of existing structures will pose a significant harm to the environment or public health or safety.

Not Applicable

(b) If an existing structure requires modification or reconstruction to meet the performance standards, attach a compliance plan that includes design specifications, construction schedule, monitoring procedures, and evidence that the risk of harm to the environment or public health or safety is not significant during modification or reconstruction.

Not Applicable

2. Ponds, impoundments, banks, dams and embankments.

- a) Submit a general plan which complies with Section 780.25(a)(1) for each proposed sedimentation pond, water impoundment, and coal processing waste bank, dam or embankment to be located within the proposed permit area.

See [Attachment III-B-2\(a\), Addendum to the General Plan.](#)

- b) Submit detailed plans which comply with Section 780.25(a)(2&3) and 816.91-816.93 for each coal mine waste dam and embankment to be constructed on the increment which you currently propose to mine.

N/A

- c) Submit detailed design plans which comply with Sections 780.25(a) (2&3) and 816.49, for each temporary or permanent water impoundment to be constructed on the increment you currently propose to mine.

N/A

- d) Submit detailed design plans, which comply with Sections 780.25(a) (2&3) and 816.81-816.85, for coal mine waste bank to be constructed on the increment you currently propose to mine.

N/A

- e) Submit detailed plans which comply with Sections 780.25(a)(2&3) and 816.91-816.93 for each coal mine waste dam and embankment to be constructed on the increment which you currently propose to mine.

N/A


WARRIOR MET COAL MINING, LLC
MINE NO. 7, P-3247, R-57
ATTACHMENT III-B-2(a)

GENERAL ENGINEERING PLAN CERTIFICATION STATEMENT

I, Jordan McGehee, a licensed professional engineer, hereby certify that the information, cross-sections, data, maps, etc., contained in this general plan in Attachment III-B-2-A is true and correct to the best of my knowledge and belief.

McGehee Engineering Corp.

Jordan McGehee, P.E.
Alabama Reg. No. 37129

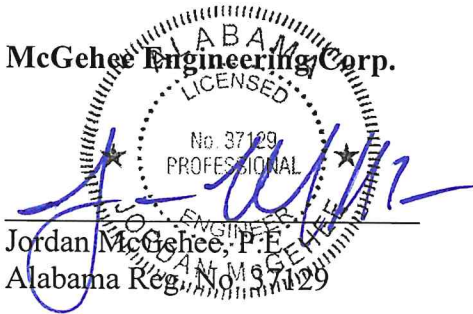

5/21/26

Date

ADDENDUM TO THE GENERAL PLAN

The addendum to the General Plan consists of adding 19 acres to Increment No. 1 for a shaft site and a powerline right of way and 5 acres for a utility borehole and access.

Warrior Met Coal Mining, LLC proposes to acquire a Construction Stormwater Permit from the Alabama Department of Environmental Management (ADEM) to control surface runoff during the construction period. The ADEM General Permit approval is forthcoming.

The permit will remain in place during the site grading and construction activities. Best management practices will be used as required by that permit and placed in strategic locations as approved by the permit. See typical BMP drawings [silt fences](#), [hay bale dams](#), [rock check dams](#) and [sumps](#). The type of structure will depend on the size of the drainage area. For small areas and sheet flow silt fences and/or hay bale dams will be used. For larger drainage areas rock check dams and/or sumps and sediment traps will be used. Inspections will be performed on all the structures during the life of the permit to ensure they are functioning as required by the permit.

As the final grading of the site nears completion some of the pre-construction structures will be converted from silt fences to rock check dams, sumps and sediment traps due to the increase of drainage areas.

5. Transportation Facilities (780.33, 780.37)

This revision proposes to add 34 acres of ancillary access roads for the powerline route, two shaft site and a utility borehole. The ancillary roads will be constructed in the proposed locations seen on [Road Map 1 of 2](#) and [Road Map 2 of 2](#). All necessary BMPs will be implemented during the construction of the ancillary roads to control any runoff from any disturbance. Any needed BMPs for maintenance operations during the lifetime of the use of the ancillary roads will be implemented.

- (a) Describe the measures to be taken to ensure the interest of the public and landowners affected are protected if disturbance within 100 feet of the right-of-way or relocation of a public road is proposed.
 - (1) Appropriate warning signs will be posted along the road right-of-way a minimum of five (500') hundred feet from the entrance of the proposed disturbance.
 - (2) Appropriate advertisements, informing the public and affected landowners, will be run in the local newspaper prior to any disturbance within the one hundred (100') feet setback of or the relocation of any public road right-of-way.
 - (3) All safety requirements of the appropriate Federal, State, County, or Local governments, concerning public health and safety, will be followed.
 - (4) In areas where disturbance is proposed within one hundred (100') feet of the road right-of-way, earthen berms, guard rails, or barricades will be constructed as necessary to prevent accidental entrance into the mine area and to prevent safety hazards.
- (b) Describe any unique design, feature, or structure which is necessary for the road to meet the performance standards of Subchapter K using any necessary maps, plans, or cross-sections.

Describe, in detail, the measures to be taken during construction, maintenance and use of the transportation facilities to prevent damage to fish and wildlife and their habitat; public and private property; and erosion, siltation, and pollution of water.

Silt fences, hay filter dams, dust control on roads, vegetation, diversion ditches and other prudent practices will be utilized in controlling runoff. Cut and fill slopes created by road construction shall be grassed to ensure stabilization and prevent erosion.

**DESIGN, CONSTRUCTION, MAINTENANCE, AND
RECLAMATION SPECIFICATIONS FOR ANCILLARY ROADS**

1. LOCATION

- A) Ancillary roads will be located on ridges or high areas or on the most stable available slopes so as to control and prevent erosion, siltation, flooding, and adverse impacts to fish and wildlife, or their habitat and related environmental values, to the extent possible.
- B) No part of any ancillary road will be located in the channel of an intermittent or perennial stream without written approval from the Regulatory Authority, in accordance with 880-X-10C-.12 thru 880-X-10C-.14 and 880-X-10C-.28.
- C) If at all possible, ancillary roads will be located upstream of sediment basins to prevent, control and minimize additional contributions of suspended solids to stream flow or runoff outside the permit area, the violation of applicable State or Federal water quality standards, seriously altering the normal flow of water in stream-beds or drainage channels, and damage to all public or private property.
- D) In instances where it is not possible to locate ancillary roads in the above manner, sediment control will be achieved by the use of silt fences, rock check dams, hay bale berms, etc.

2. DESIGN REQUIREMENTS

- A) Ancillary roads will be designed, constructed, reconstructed and maintained to have adequate drainage control structures to safely pass the peak runoff anticipated from a 10 year, 6 hour precipitation event.

3. CONSTRUCTION REQUIREMENTS

- A) The foundation area of the roadbed will be cleared and grubbed of all organic material and the topsoil will be removed. The disturbed area will be kept to the minimum necessary to accommodate the roadbed and/or associated drainage ditch construction.
- B) The road construction material will be suitable subgrade material, free of sod, roots, stumps, etc., and will not contain rocks which exceed twelve (12) inches in diameter. The road construction material will be placed in layers (12-inch maximum thickness) and compacted to ninety-five (95%) percent of the standard proctor density, as set forth in ASTM.
- C) The minimum top width of ancillary roads will under no circumstance be less than ten (10) feet and will be of maximum width necessary to facilitate the largest equipment using the road.

**DESIGN, CONSTRUCTION, MAINTENANCE, AND
RECLAMATION SPECIFICATIONS FOR ANCILLARY ROADS
(Con't.)**

- D) Roadbeds for ancillary roads will be cut into consolidated, non-erodible material or will be surfaced with sufficiently durable, non-toxic, non-acid forming material as needed for the anticipated duration and frequency of use of the road. Because of the short-term duration and infrequency of use of most ancillary roads, sufficiently durable mine overburden material from the mine site will be used for surfacing material, placed and compacted on the roadbed surface a minimum depth of four (4) inches. In instances where ancillary roads are proposed for an extended duration or heavy usage is anticipated, then durable, non-toxic, non-acid forming material, such as chert, crushed limestone, redrock, and/or crushed sandstone will be placed and compacted on the roadbed surface a minimum depth of four (4) inches .
- E) Ancillary roads will be constructed with no sustained grades of ten (10%) percent, unless unavoidable. If unavoidable, sediment control facilities such as silt fences, hay dams and/or rock check dams will be installed at strategic locations to prevent erosion and ensure stability. Grades greater than fifteen (15%) percent will require ditch relief drains, cross over drains and road drainways at a minimum of three hundred (300) feet apart.

4. DRAINAGE AND SEDIMENT CONTROL REQUIREMENTS

- A) Ancillary roads will be constructed, reconstructed, and maintained to have adequate drainage control, using structures such as, but not limited to bridges, culverts, drainage pipes, ditches, cross drains, and ditch relief drains designed to safely pass the peak runoff anticipated from a 10 year, 6 hour precipitation event. All drainage control structures will be designed and constructed in such a manner whereas, to allow a free and operating conditions to prevent, control, and minimize erosion at the inlets and outlets.
- B) Culverts and drainage pipes will be designed and installed to provide adequate support for the load of the largest equipment using the road. All culverts or drainage pipes with diameters of forty-eight (48) inches or less will be covered with a minimum of one (1) foot and the maximum cover will not exceed fifty-seven (57) feet of desirable compacted material. All culverts or drainage pipes with diameters greater than forty-eight (48) inches will be covered with a minimum of two (2) feet and the maximum cover will not exceed forty-one (41) feet of desirable compacted material.
- C) Culverts and drainage pipes will be designed and installed to allow adequate freeboard to prevent overtopping of the embankment.
- D) Drainage ditches, cross drains, and ditch relief drains will be constructed and maintained, as needed, to prevent uncontrolled surface drainage over the road surface and roadway embankment.
- E) Drainage ditches will be constructed with no sustained grades greater than five (5%) percent, unless unavoidable. If ditches must be constructed with grades in excess of five (5%) percent, drainage ditches will be lined with suitable liner material, such as, riprap, concrete, asphalt or durable rock, to prevent erosion and ensure stabilization.

**DESIGN, CONSTRUCTION, MAINTENANCE, AND
RECLAMATION SPECIFICATIONS FOR ANCILLARY ROADS
(Con't.)**

- F) Sediment control will be achieved by the use of silt fences, rock check dams, hay bale berms, etc. in strategic locations, where necessary.
- G) Upon completion of construction of ancillary roads, the side slopes of the roadway cut and fill sections, including all borrow areas formed in the construction, areas used for disposal of excess material, ditches, etc. will be seeded with a mixture of perennial and annual grasses, fertilized and mulched to prevent erosion and ensure restabilization. Grass mixtures will include, but not be limited to, fescue, bermuda, rye grass, browntop millet, clover and sericea.

5. INSPECTION AND MAINTENANCE REQUIREMENTS

- A) Routine inspections and maintenance (such as regrading, resurfacing, maintenance of sediment control structures, spot replanting, and dust control) will be conducted regularly during the life of each road to ensure that each road continually meets design and performance standards.
- B) Dust control will be achieved by the periodic application of water, chemical binders and/or other dust suppressants.
- C) Any road damaged by a catastrophic event, such as a flood, or earthquake, will be repaired as soon as is practicable after the damage has occurred.

6. REMOVAL AND RECLAMATION REQUIREMENTS

- A) All roads not to be retained under an approved postmining land use will be removed and reclaimed in accordance with the approved grading and reclamation plans as soon as practicable after it is no longer needed for mining and reclamation purposes. This removal and reclamation will include:
 - 1. Closing the road to traffic;
 - 2. Removing all bridges, culverts, drainage pipes, and other drainage control structures, unless otherwise approved as part of the postmining land use;
 - 3. Removing and/or otherwise disposing of road surfacing materials, that are not compatible with the postmining land use and revegetation requirements, onsite or removed and stored for re-use;
 - 4. Reshaping and regrading cut and fill slopes as necessary to be compatible with the postmining land use and to compliment the natural drainage pattern of the surrounding terrain;
 - 5. Protecting the natural drainage patterns by installing dikes or cross drains as necessary to control surface runoff and erosion;

**DESIGN, CONSTRUCTION, MAINTENANCE, AND
RECLAMATION SPECIFICATIONS FOR ANCILLARY ROADS
(Con't.)**

6. Scarifying or ripping the roadbed, replacing topsoil or substitute material, and revegetating the entire disturbed area in accordance with the approved reclamation plan.

7. TYPICAL ROADBED CONFIGURATION

- A) See attached [typical ancillary road drawing](#) for an illustration of the typical roadbed configurations.

WARRIOR MET COAL MINING, LLC
MINE NO. 7, P-3247, R-57