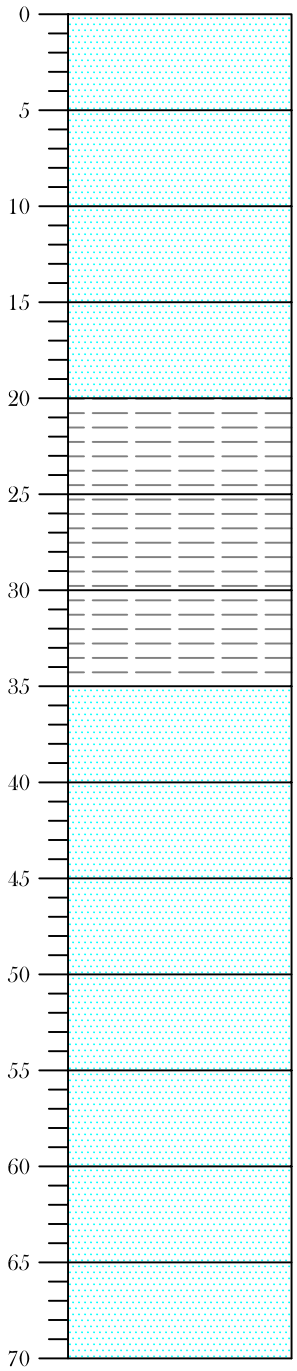

INTERVAL:	DESCRIPTION:
0'-5'	Sandstone, Tannish Brown
5'-10'	Sandstone, Tan
10'-15'	Sandstone, Tan
15'-20'	Sandstone, Tan
20'-25'	Shale, Gray, Medium Hard
25'-30'	Shale, Gray, Medium Hard
30'-35'	Shale, Light Gray, Medium Hard
35'-40'	Sandstone, Tan
40'-45'	Sandstone, Tan
45'-50'	Sandstone, Tan
50'-55'	Sandstone, Tan
55'-60'	Sandstone, Tan
60'-65'	Sandstone, Tan
65'-70'	Sandstone, Tan

BIRMINGHAM COAL AND COKE CO., INC.

DRAWN BY: J.R.W.	DATE: 09/20/11	GOODEN CREEK #2 LITHOLOGIC DESCRIPTION FOR BCGCMW6B
APPROVED BY: J.D.M.	DATE: 09/20/11	
SCALE: 1" = 10'	SHEET: 1 OF 2	CARBON HILL USGS QUADRANGLE

DSM
DESIGN GROUP, LLC
ENGINEERING / SURVEYING
1400 VIKING DRIVE
JASPER, ALABAMA 35501
TELEPHONE: (205) 221-6262

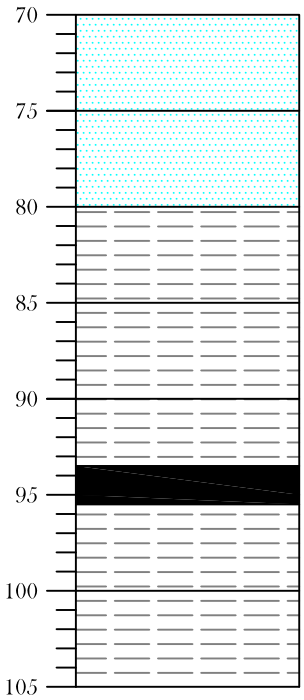

INTERVAL:	DESCRIPTION:
70'-75'	Sandstone, Tan
75'-80'	Sandstone, Brown
80'-85'	Shale, Light Gray, Fine Grained
85'-90'	Shale, Light Gray, Fine Grained
90'-93.5'	Shale, Light Gray, Fine Grained
93.5'-95.5'	Coal Seam
95.5'-100'	Shale, Gray, Medium Hard
100'-105'	Shale, Gray, Medium Hard

SURFACE ELEVATION: 663.81'

BIRMINGHAM COAL AND COKE CO., INC.

DRAWN BY: J.R.W.	DATE: 09/20/11	GOODEN CREEK #2 LITHOLOGIC DESCRIPTION FOR BCGCMW6B
APPROVED BY: J.D.M.	DATE: 09/20/11	
SCALE: 1" = 10'	SHEET: 2 OF 2	CARBON HILL USGS QUADRANGLE

DSM
DESIGN GROUP, LLC
ENGINEERING / SURVEYING
1400 VIKING DRIVE
JASPER, ALABAMA 35501
TELEPHONE: (205) 221-6262