


TYPICAL IMPOUNDMENT CLAY LINER CROSS SECTION

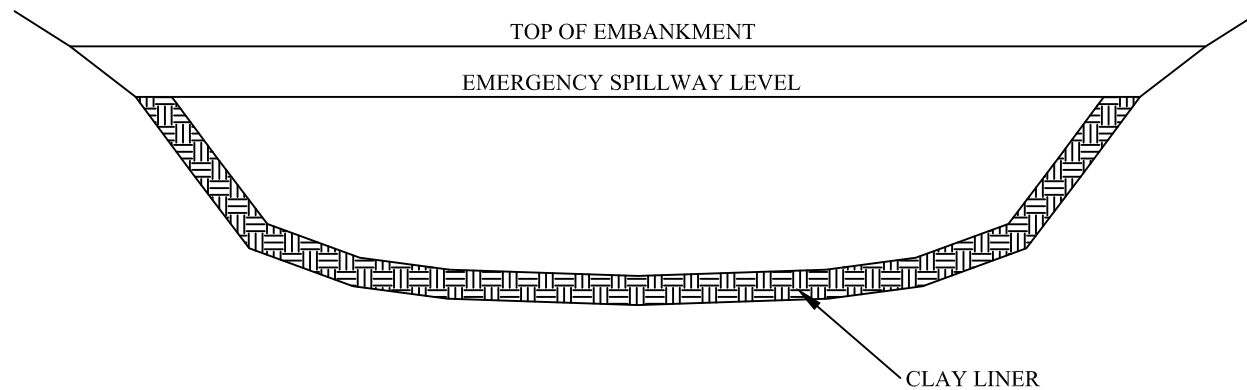

THE POOL AREA OF THE BASIN SHALL BE LINED WITH A MINIMUM ONE (1') FOOT OF CLAY MATERIAL UP TO THE EMERGENCY SPILLWAY ELEVATION. THE CLAY LINER MATERIAL SHALL BE PLACED IN LIFTS NO GREATER THAN SIX (6") INCHES AND COMPACTED TO NINETY-FIVE (95) PERCENT OF THE STANDARD PROCTOR DENSITY.